

COOKING LINES

KOCHSERIEN / COTTURA ORIZZONTALE
LIGNES DE CUISSON / LINEAS DE COCCIÓN



FOOD SERVICE EQUIPMENT
WORLDWIDE



SERIES 700 - GAS FRYERS

Cooking



Heat exchange pipes in the well



Free well

	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung kW	Heating Beheizung	Version Version	Oil drain-off pan Ölablasswanne included
	VS7040FRGS13*	400	400•730•870	12,0			No
	VS7080FRGS13*	800	800•730•870	24,0			No
	VS7040FRG17VL*	400	400•730•870	16,5	 16,5 kW  0,1 kW		Yes
	VS7080FRG17VL*	800	800•730•807	33,0	 33 kW  0,2 kW		Yes




* All models are delivered with flue extension.



- The Serie 700 of gas fryers has different models available in 13 and 17 liters. Equipped with heat exchanger pipes in the well, this feature guarantees better heat transmission and an optimal performance or free well, heating by external stainless steel burners with vertical optimized flame distribution.
- All models are with thermostatic regulation of oil temperature up to a maximum of 190°C and pilot burners with piezoelectric ignition.
- Pressed working top in stainless steel AISI 304, 20/10 thickness.



Accessories

VBO	V40CAM	V80CAM	VC12FRGS13	VC1FRGS13	VC12FRE17	VC1FRE17
Oil drain-off pan	Drawn diverter for 400 mm modules	Drawn diverter for 800 mm modules	1/2 basket for fryers 13 lt.	1/1 basket for fryers 13 lt.	1/2 basket for fryers 17 lt.	1/1 basket for fryers 17 lt.
						

Baskets scheme



Basket Composition Korb-Bestückung included	Capacity Fassungsvermögen Lt.	Power supply Netzspannung
	13	-
	13 + 13	-
	17	220 - 240 V 1+N 50 Hz
	17 + 17	220 - 240 V 1+N 50 Hz





Cooking

SERIES 700 - ELECTRIC FRYERS AND HEATED CHIP DUMP



Reversible heating element



Lifting heating element



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung kW	Heating Beheizung	Version Version	Oil drain-off pan Ölablasswanne included
	VS7040FRE88	400	400•730•870	14,0		Reversible heating elements	Yes
	VS7040FRE17X	400	400•730•870	16,5		Reversible heating elements	Yes
	VS7080FRE17X	800	800•730•870	33,0		Reversible heating elements	Yes
	VS7040FRE10T	400	400•730•250	9,0			No
	VS7040FRE10		400•730•870				
	VS7080FRE10T	800	800•730•250	18,0			No
	VS7080FRE10		800•730•870				
	VS7040SPET	400	400•730•250	1,0		-	-



- The Serie 700 electric fryers are available with single and double wells. Two versions available: Electric supply by rotating heating elements or by lifting elements.
- Oil temperature controlled by mechanical thermostat with adjustment up to 190°C.
- Working top in stainless steel AISI 304 and 20/10 thickness.



Accessories

VS7040B

Open stand
400 mm



H2 CABINETS

R22



V40PDX

Right door for
stand 400 mm



V40PSX

Left door for stand
400 mm



VC1FRE88

1/1 basket for
fryer 8+8 lt.



VC12FRE17

1/2 basket for
fryers 17 lt.



VC1FRE17

1/1 basket for
fryers 17 lt.



C12FR

1/2 basket for
fryers 10 lt.




C1FRE10

1/1 basket for
fryers 10 lt.

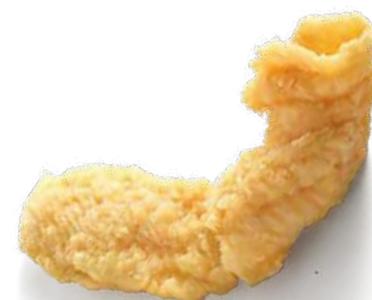
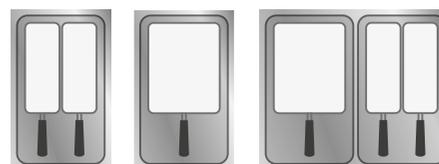


VBO

Oil drain-off pan



Baskets scheme



Basket Composition Korb-Bestückung included	Capacity Fassungsvermögen Lt.	Power supply Netzspannung
	8 + 8	380 - 415 V 3+N 50-60 Hz
	17	380 - 415 V 3+N 50-60 Hz
	17 + 17	380 - 415 V 3+N 50-60 Hz
	10	380 - 415 V 3+N 50-60 Hz
	10 + 10	380 - 415 V 3+N 50-60 Hz
-	-	220 - 240 V 1+N 50-60 Hz





Cooking

SERIES 700 - REFRIGERATED UNDERCOUNTERS



HCE2016 + Z/FB00AY255 + 3 x Z/CU700

Item Code Artikelnummer	Working Temperature Arbeitstemperatur °C	Capacity Kapazität GN	Absorbed Power Anschlusswert Watt	Dimensions Abmessungen mm	Stainless Steel Type Edelstahl AISI	Insulation Thickness Isolierung mm
----------------------------	------------------------------------------------	-----------------------------	-----------------------------------------	---------------------------------	----------------------------------------	------------------------------------------



BNA0080	-2°/+8°	1 x GN2/1	1100	1200•700•600	304	50
BNB0040	-10°/-20°	1 x GN2/1	1100	1200•700•600	304	50



HCE2014	-2°/+8°	2 x GN 1/1	170	1200•700•600	304	50
----------------	---------	------------	-----	--------------	-----	----



HCE2016	-2°/+8°	3 x GN 1/1	500	1600•700•600	304	50
----------------	---------	------------	-----	--------------	-----	----



HCE2018	-2°/+8°	4 x GN 1/1	510	2200•700•600	304	50
----------------	---------	------------	-----	--------------	-----	----



Accessories

Z/CU700

2 x 1/2
h=100 mm



! Only for positive counters

Z/FB00AY255






Set of 6 wheels with and without brakes (2+4)






Refrigerant Gas Kühlgas	Power Supply Netzspannung
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz






SERIES 700 - GENERAL ACCESSORIES

Version Version	Item Code Artikelnummer	Description Beschreibung
	VS7040B	Open stand 400 mm
	VS7040BH2	Open stand 400 mm H2 R22
	VS7080B	Open stand 800 mm
	VS7080BH2	Open stand 800 mm H2 R22
	VS70120B	Open stand 1200 mm
	V40PDX	Right door for stand 400 mm
	V40PSX	Left door for stand 400 mm
	V80P	Double door for stand 800 mm
	V120P	Set of 3 doors for stand 1200 mm
	VKC11	Set of 2 drawers GN 1/1 for 400 mm modules, h=225 mm
	VKC21	Set of 2 drawers GN 2/1 for 800 mm modules, h=225 mm
	VRG11	Set of tray slides GN 1/1 for 6 grids
	VRG21	Set of tray slides GN 2/1 for 6 grids
	VKR22	Set of 2+2 wheels with brake (only suitable for freestanding models)
	Z/MER40	Heating group for cabinet 40 cm Power 2 kW, 220-240 V 50-60 Hz
	Z/MER80	Heating group for cabinet 80 cm Power 2 kW, 220-240 V 50-60 Hz
	Z/MPH50	Lowered foot H 50 mm for installation on hollow masonry base
	VGZ	Plinth junction

Version Version	Item Code Artikelnummer	Description Beschreibung
	VS70PLDX	Side panel for back to back equipment, right side
	VS70PLSX	Side panel for back to back equipment, left side
	VS140PL	Side panel for back to back equipment VS700 - 1400 mm
	V40ZFT	Front plinth for 400 mm module top.
	V80ZFT	Front plinth for 800 mm module top.
	V120ZFT	Front plinth for 1200 mm module top.
	V70ZLT	Side plinth for 700 mm module top.
	V40ZF	Front plinth for 400 mm module.
	V80ZF	Front plinth for 800 mm module.
	V120ZF	Front plinth for 1200 mm module.
	V160ZF	Front plinth for 1600 mm module.
	V200ZF	Front plinth for 2000 mm module.
	V240ZF	Front plinth for 2400 mm module.
	V70ZL	Side plinth.700 mm
	V140ZLP	Pass- through side plinth 1400 mm.
	VS70PLQDX	Squared side panel for back to back equipment, right side
	VS70PLQSX	Squared side panel for back to back equipment, left side
	VS140PLQ	Squared side panel for back to bwack equipment VS700 - 1400 mm
	VS40PRCAM	Flue extension 400 mm
	VS80PRCAM	Flue extension 800 mm
	VS120PRCAM	Flue extension 1200 mm
	VKSP40	Bridge system supports 40 l
	VKSP80	Bridge system supports 80 l
	VKSP100	Bridge system supports 100 l
	VKSP120	Bridge system supports 120 l
	VKSP160	Bridge system supports 160 l
	VS7040PSFTS	Splash guard for griddle plates VS7040FT...V...
	VS7080PSFTS	Splash guard for griddle plates VS7080FT...V...
	Z/GSFT	Scarper for smooth plate
	VRASFTR	Scarper for ribbed plate



SERIES 700 - GENERAL ACCESSORIES

Version Version	Item Code Artikelnummer	Description Beschreibung
	VS70PL1F	Flate plate, 1 burner Dim [mm]: 390 • 284 • 22
	Z/MCASB	Water tap to be fixed on the side or on the top of neutral modules (In the order please specify the model of the equipment the water tap is to be fixed on - if it is not a neutral module please specify the side)
	VSPT15Q	Tray holder structure + column L= 1000÷1500
	VSPT20Q	Tray holder structure + column L= 1500÷2000
	VSPT25Q	Tray holder structure + column L= 2000÷2500
	VSPT30Q	Tray holder structure + column L= 2500÷3000
	VSPT35Q	Tray holder structure + column L= 3000÷3500
	VSPT40Q	Tray holder structure + column L= 3500÷4000
	VSPT45Q	Tray holder structure + column L= 4000÷4500
	VSPT50Q	Tray holder structure + column L= 4500÷5000
	VSPTSAL11	Price increase for integration of electric salamander support GN 1/1 on tray holder structure. Dimensions 380x450 mm
	VSS11	Support for electric salamander GN 1/1
	VPES	Schuko electrical socket with cover IP 44