

COOKING LINES

KOCHSERIEN / COTTURA ORIZZONTALE
LIGNES DE CUISSON / LINEAS DE COCCIÓN



FOOD SERVICE EQUIPMENT
WORLDWIDE



Cooking

SERIES 700 - GAS RANGES



	Item code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Burner Brennerleistung kW	Ovens Öfen	Power supply Netzspannung
	VS7040PCGT	400	400•730•250	9,2	Back 3,7 Front 5,5	- -	-
	VS7080PCGT	800	800•730•250	18,4	Back 3,7+3,7 Front 5,5+5,5	- -	-
	VS70120PCGT	1200	1200•730•250	25,8	Back 3,7+3,7+3,7 Front 5,5+3,7+5,5	- -	-



- The Serie 700 open burners models are available with 2,4,6 burners in the top version.
- Working top in stainless AISI 304, 20/10 thickness with removable enamelled containers.
- Power from 3,7 kW up to 5,5 kW. High efficiency cast iron burners and brass flame spreaders, single or double crown for an optimal heat distribution and performance.

Accessories

VS7040B

Open stand
400 mm



VS7080B

Open stand
800 mm



VS70120B

Open stand
1200 mm



H2 CABINETS

R22

V40PDX

Right door for
stand 400 mm



V40PSX

Left door for stand
400 mm



V80P

Double door for
stand 800 mm




V120P

Set of 3 doors for
stand 1200 mm



Details

DOUBLE AND SINGLE-CROWN BURNERS

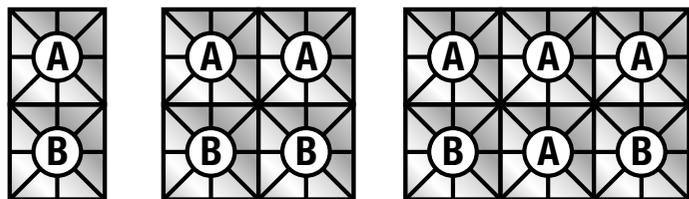

Single-crown burners: A = 3,7 kW / Double-crown burners: B = 5,5 kW





Cooking

SERIES 700 - GAS RANGES



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Burner Brennerleistung kW	Ovens Öfen	Power supply Netzspannung
	VS7040PCGST	400	400•730•250	12,0	Back 6 Front 6	-	-
	VS7080PCGST	800	800•730•250	24,0	Back 6+6 Front 6+6	-	-
	VS70120PCGST	1200	1200•730•250	36,0	Back 6+6+6 Front 6+6+6	-	-



- The Serie 700 open burners models are available with 2,4,6 burners in the top version.
- Pressed working top in stainless AISI 304, 20/10 thickness.
- High efficiency cast iron burners and brass flame spreaders, double crown each 6,0 kW for an optimal heat distribution and performance.



Accessories

VS7040B

Open stand
400 mm



VS7080B

Open stand
800 mm



VS70120B

Open stand
1200 mm



H2 CABINETS

R22

Page 76

V40PDX

Right door for
stand 400 mm



V40PSX

Left door for stand
400 mm



V80P

Double door for
stand 800 mm




V120P

Set of 3 doors for
stand 1200 mm



Details

DOUBLE CROWN BURNERS

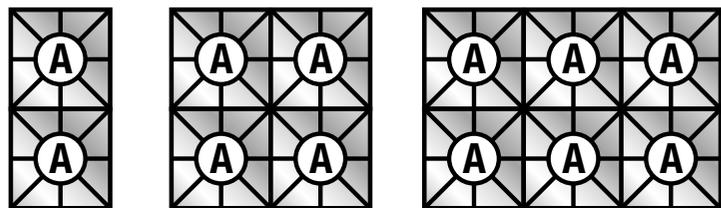

Double-crown burners: A = 6,0 kW





Cooking

SERIES 700 - GAS RANGES




Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Burner Brennerleistung kW	Ovens Öfen
 VS7080CFG	800	800•730•870	26,4	Back 3,7+3,7 Front 5,5+5,5	 Static gas oven 8 kW, GN 2/1
VS7080CFGE	800	800•730•870	Gas: 18,4 Electric: 6,0	Back 3,7+3,7 Front 5,5+5,5	 Static electric oven 6 kW, GN 2/1
 VS70120CFG	1200	1200•730•870	33,8	Back 3,7+3,7+3,7 Front 5,5+3,7+5,5	 Static gas oven 8 kW, GN 2/1
VS70120CFGE	1200	1200•730•870	Gas: 25,8 Electric: 6,0	Back 3,7+3,7+3,7 Front 5,5+3,7+5,5	 Static electric oven 6 kW, GN 2/1
 VS70120CFGG	1200	1200•730•870	35,8	Back 3,7+3,7+3,7 Front 5,5+3,7+5,5	 Static gas oven 10 kW, Chamber: 97x30,5x66 cm Grill: 93x65 cm



- The Serie 700 gas range models are available with 4 or 6 burners on static oven with or without cabinet.
- Power from 3,7 kW up to 5,5 kW. High efficiency cast iron burners and brass flame spreaders, single or double crown for an optimal heat distribution and performance.
- Working top in stainless AISI 304, 20/10 thickness with removable enamelled containers.


- Static ovens with fully stainless steel chamber and pressed inner door with labyrinth sealing. Suitable for GN 2/1 grids.
- Gas version: 8 kW power with ignition by piezo device.
- Electric version: 6 kW

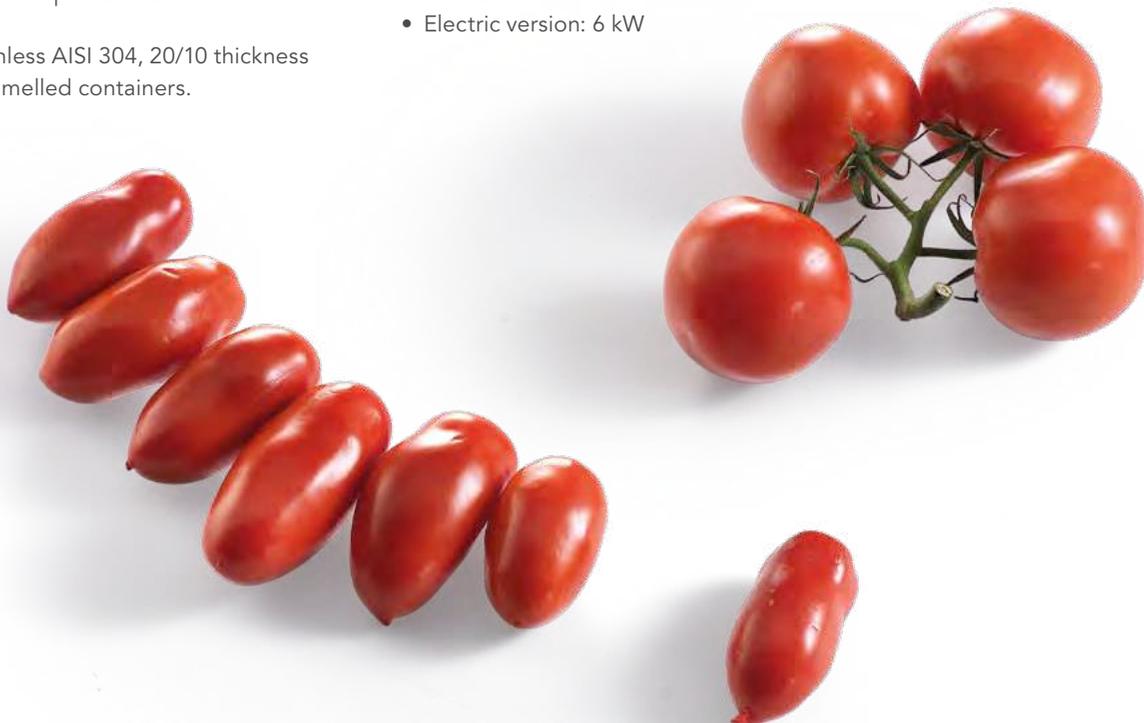

Power supply
Netzspannung

Details

DOUBLE AND SINGLE-CROWN BURNERS

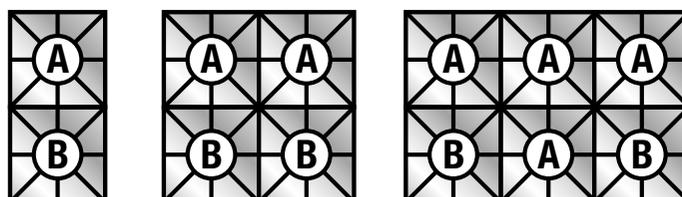

Single-crown burners: A = 3,7 kW / Double-crown burners: B = 5,5 kW



380 - 415 V
3+N 50-60 Hz

380 - 415 V
3+N 50-60 Hz



Cooking

SERIES 700 - GAS SOLID TOPS



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Burner Brennerleistung kW	Ovens Öfen	Power supply Netzspannung
	VS7080TPGT	800	800•730•250	9,0	9,0	- -	-
	VS7080TPPCGT	800	800•730•250	15,2	Left side: solid top 6,0 kW Right side: back 3,7 kW + front 5,5 kW	- -	-
	V70120TPPCG2T	1200	1200•730•250	24,4	Left + right side: back 3,7 kW + front 5,5 kW middle: solid top 6,0 kW	- -	-



- Solid tops with radiant hotplate in heavy gauge cast iron and with central bullseye.
- Heating by cast iron burner of 9 kW for temperature up to 450°/500°C (in the TP, plate power of 9 kW and in the TPP model plate power of 6 kW). Gas supply controlled by safety valve with thermocouple, with piezo ignition.
- Power from 3,7 kW up to 5,5 kW. High efficiency cast iron burners and brass flame spreaders, single or double crown for an optimal heat distribution and performance.
- Working top in stainless AISI 304, 20/10 thickness with removable enamelled containers.



Accessories

VS7080B

Open stand
800 mm



VS70120B

Open stand
1200 mm



H2 CABINETS

R22

V80P

Double door for
stand 800 mm



V120P

Set of 3 doors for
stand 1200 mm



V40CAM

Drawn diverter for
400 mm modules




V80CAM

Drawn diverter for
800 mm modules



Details

DOUBLE AND SINGLE-CROWN BURNERS

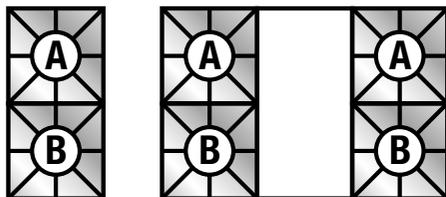

Single-crown burners: A = 3,7 kW

Double-crown burners: B = 5,5 kW





Cooking

SERIES 700 - GAS SOLID TOP RANGES



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Burner Brennerleistung kW	Ovens Öfen
	VS7080TPFG	800	800•730•870	17,0	9,0	 Static gas oven 8 kW, GN 2/1
	VS7080TPPCFG	800	800•730•870	23,2	Left side: solid top 6,0 kW Right side: back 3,7 kW + front 5,5 kW	 Static gas oven 8 kW, GN 2/1
	VS70120TPFG	1200	1200•730•870	26,2	Left side: solid top 9,0 kW Right side: back 3,7 kW + front 5,5 kW	 Static gas oven 8 kW, GN 2/1
	V70120TPPCFG2	1200	1200•730•870	32,4	Left + right side: back 3,7 kW + front 5,5 kW Middle: solid top 6,0 kW	 Static gas oven 8 kW, GN 2/1



- Solid tops with radiant hotplate in heavy gauge cast iron and with central bullseye. Heating by cast iron burner of 9 kW for temperature up to 450°/500°C (in the TP, plate power of 9 kW and in the TPP model plate power of 6 kW). Gas supply controlled by safety valve with thermocouple, with piezo ignition.
- Power from 3,7 kW up to 5,5 kW. High efficiency cast iron

burners and brass flame spreaders, single or double crown for an optimal heat distribution and performance.

- Working top in stainless AISI 304, 20/10 thickness with removable enamelled containers.
- Static gas ovens of 8 kW power with ignition by piezo device, fully stainless steel chamber and pressed inner door with labyrinth sealing. Suitable for GN 2/1 grids.



Accessories

V40CAM

Drawn diverter for 400 mm modules



V80CAM


Drawn diverter for 800 mm modules



Power supply
Netzspannung


Details

DOUBLE AND SINGLE-CROWN BURNERS

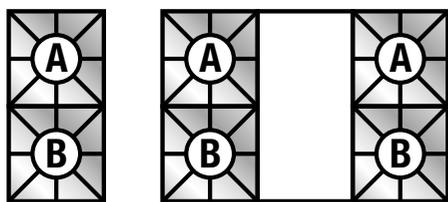

Single-crown burners: A = 3,7 kW

Double-crown burners: B = 5,5 kW

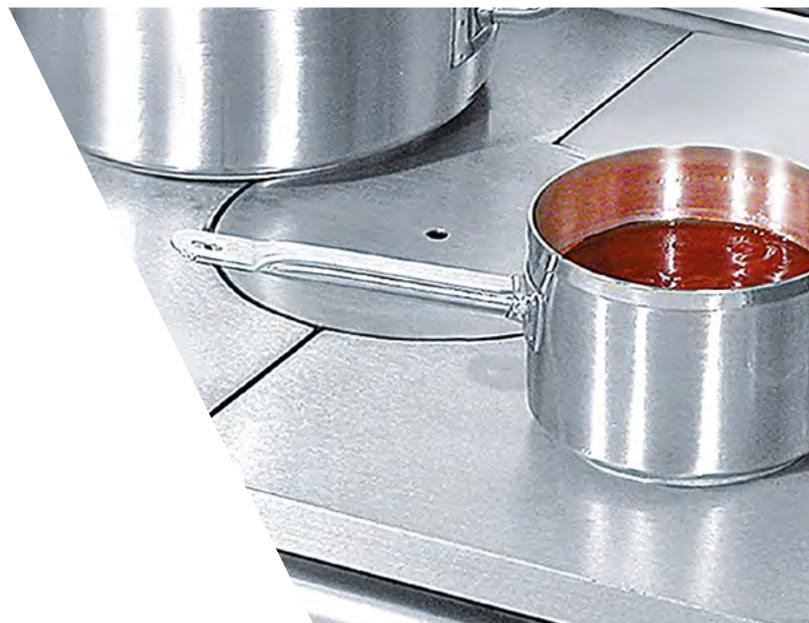



Cooking

SERIES 700 - ELECTRIC RANGES WITH ROUND PLATES



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Hot plates Kochplattenleistung kW	Ovens Öfen	Power supply Netzspannung
	VS7040PCET	400	400•730•250	5,2	Back 2,6 Front 2,6	-	380 - 415 V 3+N 50-60 Hz
	VS7080PCET	800	800•730•250	10,4	Back 2,6+2,6 Front 2,6+2,6	-	380 - 415 V 3+N 50-60 Hz
	VS7080CFE	800	800•730•870	16,4	Back 2,6+2,6 Front 2,6+2,6	 Static electric oven 6 kW GN 2/1	380 - 415 V 3+N 50-60 Hz



Ø 220 mm

- In the Serie 700, it is possible to choose between round and square electric plates each of 2,6 kW. Heating elements are hermetically sealed to the working top and controlled by 6-position switches. The particular design and the labyrinth system of the knobs assure protection from water infiltration.

- Pressed worktop in stainless AISI 304, 20/10 thickness.
- Static ovens with fully stainless steel chamber and pressed inner door with labyrinth sealing. Suitable for GN 2/1 grids.
- Electric version: 6 kW

Accessories

VS7040B

Open stand
400 mm




VS7080B

Open stand
800 mm



H2 CABINETS



V40PDX

Right door for
stand 400 mm



V40PSX

Left door for stand
400 mm



V80P

Double door for
stand 800 mm



Details




Plate dimension: Ø 220 mm





Cooking

SERIES 700 - ELECTRIC RANGES WITH SQUARE PLATES



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Hot plates Kochplattenleistung kW	Ovens Öfen	Power supply Netzspannung
	VS7040PCEQT	400	400•730•250	5,2	Back 2,6 Front 2,6	- -	380 - 415 V 3+N 50-60 Hz
	VS7080PCEQT	800	800•730•250	10,4	Back 2,6+2,6 Front 2,6+2,6	- -	380 - 415 V 3+N 50-60 Hz
	VS7080CFEQ	800	800•730•870	16,4	Back 2,6+2,6 Front 2,6+2,6	 Static electric oven 6 kW GN 2/1	380 - 415 V 3+N 50-60 Hz



220x220 mm

- In the Serie 700, it is possible to choose between round and square electric plates each of 2,6 kW. Heating elements are hermetically sealed to the working top and controlled by 6-position switches. The particular design and the labyrinth system of the knobs assure protection from water infiltration.
- Pressed worktop in stainless AISI 304, 20/10 thickness.
- Static ovens with fully stainless steel chamber and pressed inner door with labyrinth sealing. Suitable for GN 2/1 grids.
- Electric version: 6 kW



Accessories

VS7040B

Open stand
400 mm



VS7080B

Open stand
800 mm



H2 CABINETS

R22

V40PDX

Right door for
stand 400 mm



V40PSX

Left door for stand
400 mm



V80P

Double door for
stand 800 mm



V7040IMP

Insert for square
electric plates



V7080IMP

Insert for square
electric plates



Details



Plate dimension: 220 x 220 mm





Cooking

SERIES 700 - INDUCTION RANGES



	Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Cooking zones Leistung Kochzonen kW	Ovens Öfen	Power supply Netzspannung
	VS7040INDT7	400	400•730•250	7,0	Back 3,5 Front 3,5	-	380 - 415 V 3+N 50-60 Hz
	VS7040INDT10			10,0	Back 5,0 Front 5,0	-	
	VS7080INDT14	800	800•730•250	14,0	Back 3,5+3,5 Front 3,5+3,5	-	380 - 415 V 3+N 50-60 Hz
	VS7080INDT20			20,0	Back 5,0+5,0 Front 5,0+5,0	-	
	VS7040INDWT	400	400•730•250	5,0	Wok 5,0	-	380 - 415 V 3+N 50-60 Hz



- The induction cooking ranges are the ideal solution for those who need high productivity in short time and easy cleaning.
Available with 2 or 4 zones each of 3,5 kW or 5,0 kW and a wok version with 1 zone of 5,0 kW.

- The 700 series induction models grant high efficiency without loss of heat in the environment and without heating the glass ceramic top.
- Pot detection system which activates heating upon presence of cooking receptacles.

Accessories

VS7040B

Open stand
400 mm



VS7080B

Open stand
800 mm



H2 CABINETS

R22

V40PDX

Right door for
stand 400 mm



V40PSX

Left door for stand
400 mm



V80P

Double door for
stand 800 mm



Details



Cooking zone
min. Ø 120 / max. Ø 220 mm





Cooking

SERIES 700 - GLASS CERAMIC RANGES



Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Cooking zones Leistung Kochzonen kW	Ovens Öfen	Power supply Netzspannung
 VS7080PVET	800	800•730•250	10,0	Back 2,5+2,5 Front 2,5+2,5	-	380 - 415 V 3+N 50-60 Hz
 VS7080CFVE	800	800•730•870	16,0	Back 2,5+2,5 Front 2,5+2,5	 Static electric oven 6 kW GN 2/1	380 - 415 V 3+N 50-60 Hz



- The glass ceramic cooking ranges are the ideal solution for simple, fast cooking and easy cleaning. Available as top version and oven. 4 zones each of 2,5 kW.

- Static ovens with fully stainless steel chamber and pressed inner door with labyrinth sealing. Suitable for GN 2/1 grids. Electric version: 6 kW



Accessories

VS7080B

Open stand
800 mm



H2 CABINETS

R22



V80P

Double door for
stand 800 mm



Details



Cooking zone Ø 220 mm:





Cooking

SERIES 700 - ELECTRIC SOLID TOP RANGES



Item Code Artikelnummer	Module Modul mm	Dimensions Abmessungen mm	Power Leistung Total kW	Power Cooking zones Leistung Kochzonen kW	Ovens Öfen	Power supply Netzspannung
----------------------------	-----------------------	---------------------------------	-------------------------------	---	---------------	------------------------------



VS7080TPET	800	800•730•250	10,0	4 cooking zones each 2,5 kW	-	380 - 415 V 3+N 50-60 Hz
-------------------	-----	-------------	------	--------------------------------	---	-----------------------------



VS7080TPFE	800	800•730•870	16,0	4 cooking zones each 2,5 kW	 Static electric oven 6 kW, GN 2/1	380 - 415 V 3+N 50-60 Hz
-------------------	-----	-------------	------	--------------------------------	--	-----------------------------



- The Serie 700 contains electric solid top ranges. Cooking without limits. The entire surface of the hotplate can be used and it is ideal for sauces and slow-cooking that require a constant temperature.
- Working top in stainless AISI 304, 20/10 thickness.

- Static ovens with fully stainless steel chamber and pressed inner door with labyrinth sealing. Suitable for GN 2/1 grids.
- Electric version: 6 kW



Accessories

VS7080B

Open stand
800 mm




H2 CABINETS

R22

V80P

Double door for
stand 800 mm

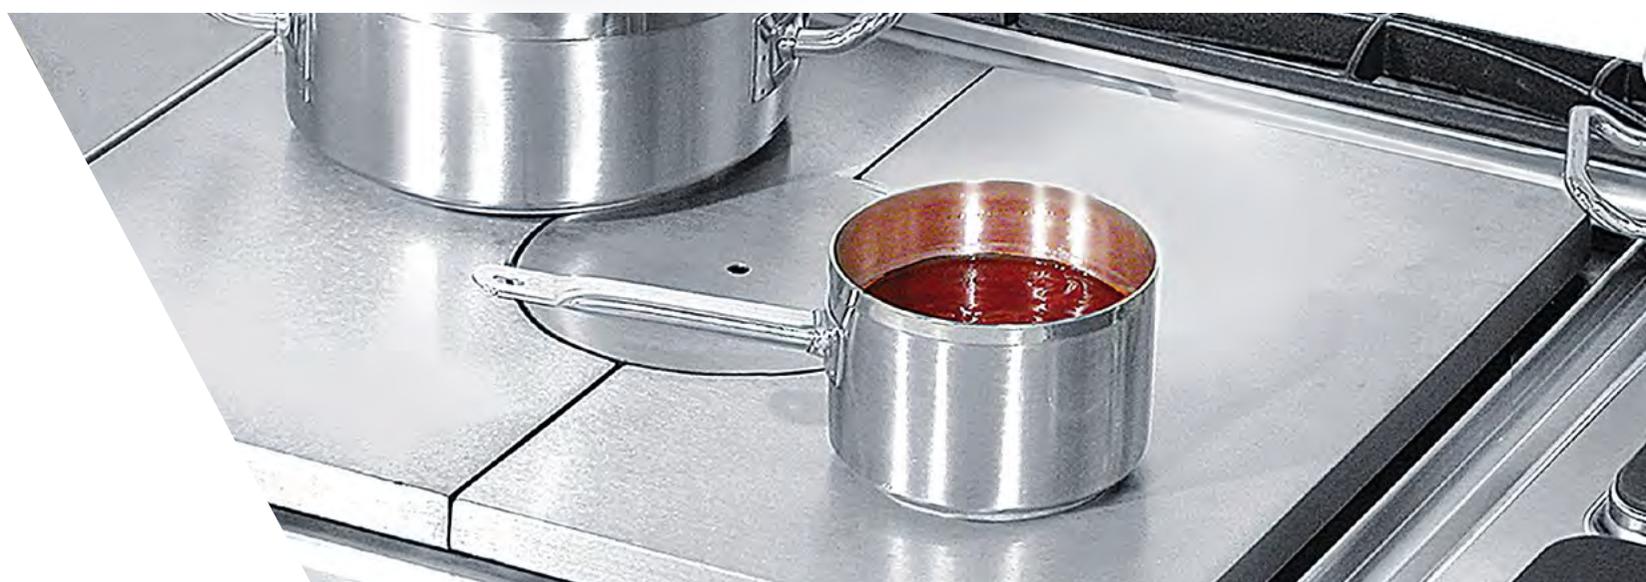



Cooking

SERIES 700 - REFRIGERATED UNDERCOUNTERS



HCE2016 + Z/FB00AY255 + 3 x Z/CU700

Item Code Artikelnummer	Working Temperature Arbeitstemperatur °C	Capacity Kapazität GN	Absorbed Power Anschlusswert Watt	Dimensions Abmessungen mm	Stainless Steel Type Edelstahl AISI	Insulation Thickness Isolierung mm
----------------------------	--	-----------------------------	---	---------------------------------	--	--



BNA0080	-2°/+8°	1 x GN2/1	1100	1200•700•600	304	50
BNB0040	-10°/-20°	1 x GN2/1	1100	1200•700•600	304	50



HCE2014	-2°/+8°	2 x GN 1/1	170	1200•700•600	304	50
----------------	---------	------------	-----	--------------	-----	----



HCE2016	-2°/+8°	3 x GN 1/1	500	1600•700•600	304	50
----------------	---------	------------	-----	--------------	-----	----



HCE2018	-2°/+8°	4 x GN 1/1	510	2200•700•600	304	50
----------------	---------	------------	-----	--------------	-----	----



Accessories

Z/CU700

2 x 1/2
h=100 mm



! Only for positive counters

Z/FB00AY255





Set of 6 wheels with and without brakes (2+4)





Refrigerant Gas Kühlgas	Power Supply Netzspannung
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz
R290	220 - 240 V 1+N 50 Hz






SERIES 700 - GENERAL ACCESSORIES

Version Version	Item Code Artikelnummer	Description Beschreibung
	VS7040B	Open stand 400 mm
	VS7040BH2	Open stand 400 mm H2 R22
	VS7080B	Open stand 800 mm
	VS7080BH2	Open stand 800 mm H2 R22
	VS70120B	Open stand 1200 mm
	V40PDX	Right door for stand 400 mm
	V40PSX	Left door for stand 400 mm
	V80P	Double door for stand 800 mm
	V120P	Set of 3 doors for stand 1200 mm
	VKC11	Set of 2 drawers GN 1/1 for 400 mm modules, h=225 mm
	VKC21	Set of 2 drawers GN 2/1 for 800 mm modules, h=225 mm
	VRG11	Set of tray slides GN 1/1 for 6 grids
	VRG21	Set of tray slides GN 2/1 for 6 grids
	VKR22	Set of 2+2 wheels with brake (only suitable for freestanding models)
	Z/MER40	Heating group for cabinet 40 cm Power 2 kW, 220-240 V 50-60 Hz
	Z/MER80	Heating group for cabinet 80 cm Power 2 kW, 220-240 V 50-60 Hz
	Z/MPH50	Lowered foot H 50 mm for installation on hollow masonry base
	VGZ	Plinth junction

Version Version	Item Code Artikelnummer	Description Beschreibung
	VS70PLDX	Side panel for back to back equipment, right side
	VS70PLSX	Side panel for back to back equipment, left side
	VS140PL	Side panel for back to back equipment VS700 - 1400 mm
	V40ZFT	Front plinth for 400 mm module top.
	V80ZFT	Front plinth for 800 mm module top.
	V120ZFT	Front plinth for 1200 mm module top.
	V70ZLT	Side plinth for 700 mm module top.
	V40ZF	Front plinth for 400 mm module.
	V80ZF	Front plinth for 800 mm module.
	V120ZF	Front plinth for 1200 mm module.
	V160ZF	Front plinth for 1600 mm module.
	V200ZF	Front plinth for 2000 mm module.
	V240ZF	Front plinth for 2400 mm module.
	V70ZL	Side plinth.700 mm
	V140ZLP	Pass- through side plinth 1400 mm.
	VS70PLQDX	Squared side panel for back to back equipment, right side
	VS70PLQSX	Squared side panel for back to back equipment, left side
	VS140PLQ	Squared side panel for back to bwack equipment VS700 - 1400 mm
	VS40PRCAM	Flue extension 400 mm
	VS80PRCAM	Flue extension 800 mm
	VS120PRCAM	Flue extension 1200 mm
	VKSP40	Bridge system supports 40 l
	VKSP80	Bridge system supports 80 l
	VKSP100	Bridge system supports 100 l
	VKSP120	Bridge system supports 120 l
	VKSP160	Bridge system supports 160 l
	VS7040PSFTS	Splash guard for griddle plates VS7040FT...V...
	VS7080PSFTS	Splash guard for griddle plates VS7080FT...V...
	Z/GSFT	Scarper for smooth plate
	VRASFTR	Scarper for ribbed plate



SERIES 700 - GENERAL ACCESSORIES

Version Version	Item Code Artikelnummer	Description Beschreibung
	VS70PL1F	Flate plate, 1 burner Dim [mm]: 390 • 284 • 22
	Z/MCASB	Water tap to be fixed on the side or on the top of neutral modules (In the order please specify the model of the equipment the water tap is to be fixed on - if it is not a neutral module please specify the side)
	VSPT15Q	Tray holder structure + column L= 1000÷1500
	VSPT20Q	Tray holder structure + column L= 1500÷2000
	VSPT25Q	Tray holder structure + column L= 2000÷2500
	VSPT30Q	Tray holder structure + column L= 2500÷3000
	VSPT35Q	Tray holder structure + column L= 3000÷3500
	VSPT40Q	Tray holder structure + column L= 3500÷4000
	VSPT45Q	Tray holder structure + column L= 4000÷4500
	VSPT50Q	Tray holder structure + column L= 4500÷5000
	VSPTSAL11	Price increase for integration of electric salamander support GN 1/1 on tray holder structure. Dimensions 380x450 mm
	VSS11	Support for electric salamander GN 1/1
	VPES	Schuko electrical socket with cover IP 44